




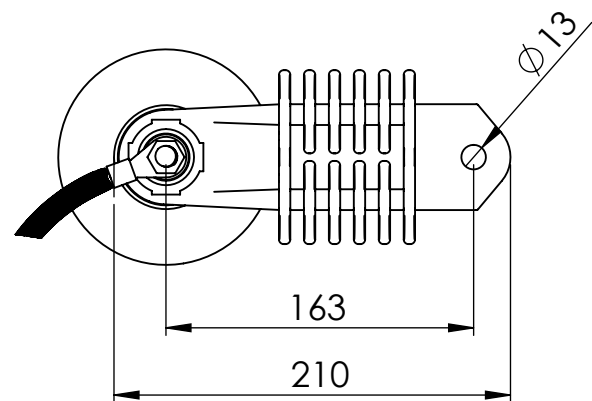

Flat washer valid
up to 35 mm²
wire




Spring washer / Grower
Flat washer / Arandela plana
Flat washer valid up to 35 mm² wire / Grapa
Hex nut / Tuerca hexagonal

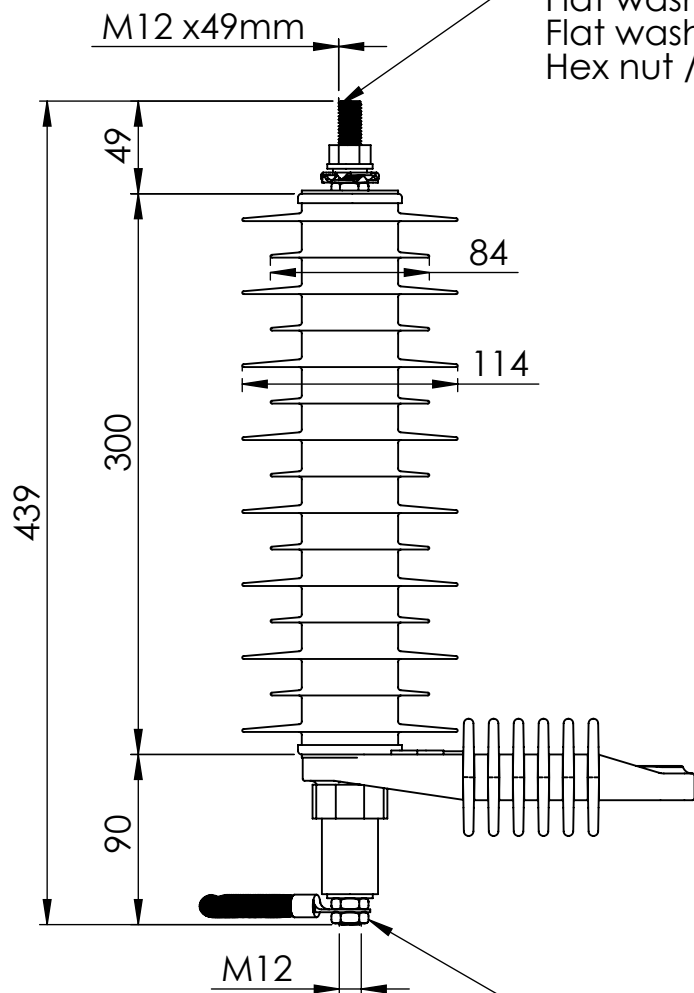

Flat washer / Arandela plana
Hex nut / Tuerca hexagonal

Creepage distance: CDmm
Línea de fuga: CDmm

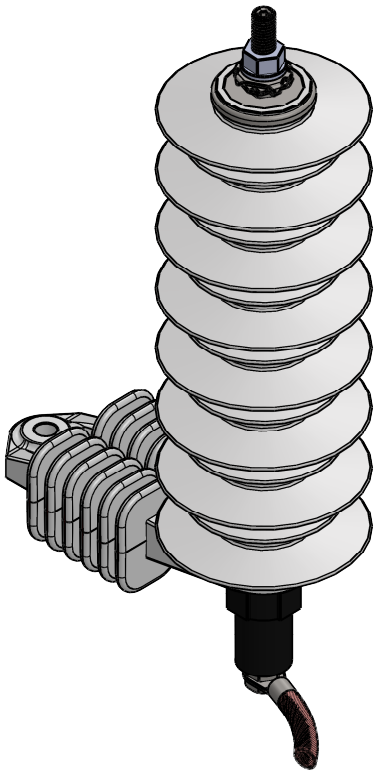

Tensión asignada (Ur) kV	Continuous operating voltage (Uc)	Arrester Type	Menor envolvente admisible	Residual voltage (Vp) / Tensión residual (Vp)							
				FOV Steep 1/20µs (kV)*	30/60 µs 125A (kV)	30/60 µs 500A (kV)	8/20 µs 1kA (kV)	8/20 µs 3kA (kV)	8/20 µs 5kA (kV)	8/20 µs 10kA (kV)	8/20 µs 20kA (kV)
36	30,6	PZDH1/36	980	131,0	70,8	76,1	79,6	86,7	91,7	100,8	109,9

Designation	Nominal discharge current (In)	Charge transfer rating (Qrs)	Thermal charge transfer rating (Qth)
DH	10	0,4	1,1



Envolvente / Housing														
Máxima tensión admisible		Maximum admissible voltage		Altura (H) mm		Height (H) mm		Línea de fuga mm		Creepage distance		Corriente de cortocircuito asignada (Is) kA		Rated short-circuit current (Is)
Tensión soportada a impulso tipo ray 1.2/50µs kV		Lightning impulse withstand voltage 1.2/50µs		Tensión soportada a frecuencia industrial, mojado 1min. kV		Power frequency withstand voltage wet 1min.		Carga asignada de corta duración SS N		Specified short-term load SSL		Carga asignada de larga duración SL N		Specified long-term load SLL
Peso máximo del pararrayos Kg		Maximum weight of arrester		Distancia de arco flashover distance mm		Flashover distance		Phase-Phase /fase-fase		phase-ground/fase-tierra		H		L
COTAS (mm)		recommended clearances / distancias recomendadas												
980	36	439	980	20	193,9	90,6	1027	728	2,90	335	457	404	439	300

TOV CURVES / CURVAS DE SOBRETENSIÓN TRANSITORIA

